



AC-240P/156-60S
 AC-245P/156-60S
 AC-250P/156-60S

www.axitecsolar.com

AXITEC
 high quality german solar company

AXIplus SE

60 cell/polycrystalline photovoltaic modules

High performance photovoltaic modules
 optimised by SolarEdge

The advantages:



12
 YEARS
 Warranty

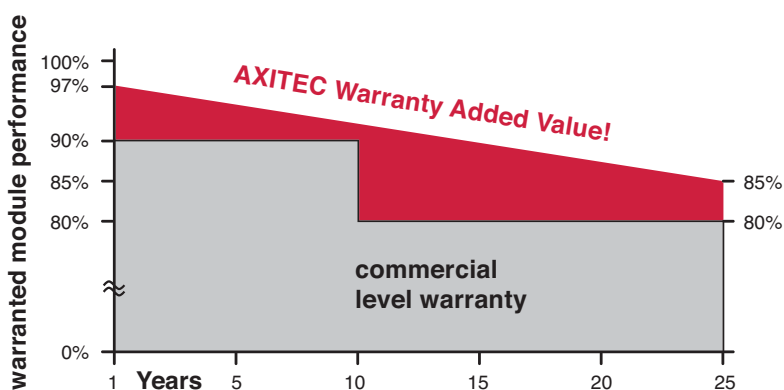


Fig. similar 60P156EN140403A

- 12** Years 12 years manufacturer's warranty
- +** Wp Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- ↓** 5.400 Pa Maximum 5400 Pa snow load
- Soft Grip** High stability due to AXITEC-Soft-Grip-Seam aluminium frame construction
- BOS** Lower BOS costs thanks to 30% longer strings
- MPP** Optimised energy output by maximised power by each module
- SAFETY** High security by deactivation of module power

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance



Management system TÜV-certified
 DIN ISO 9001:2008, Reg.-No. 12 100 34403



IEC 61215
 IEC 61730
 Snow Load Resistance
 ID 000040256



Full Member of PV CYCLE

AXIplus SE

AC-240P/156-60S
AC-245P/156-60S
AC-250P/156-60S

www.axitecsolar.com

AXITEC

high quality german solar company

Distributed by:



IEC 61215
IEC 61730
Snow Load Resistance
ID 0000040256



Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25° C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-240P/156-60S	240 Wp	30,25 V	7,98 A	8,50 A	37,20 V	14,75 %
AC-245P/156-60S	245 Wp	30,36 V	8,13 A	8,67 A	37,50 V	15,06 %
AC-250P/156-60S	250 Wp	30,70 V	8,18 A	8,71 A	37,80 V	15,37 %

Design


Frontside	3,2 mm hardened, low-reflection white glass
Cells	60 polycrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	40 mm silver anodized aluminium frame

Mecanical data

L x W x H	1640 x 992 x 40 mm
Weight	19,5 kg with frame

Power connection

Socket	Protection Class IP65 (3 bypass diodes)
Wire	approx. 1,1 m, 4 mm ²
Plug-in system	Plug/socket IP67

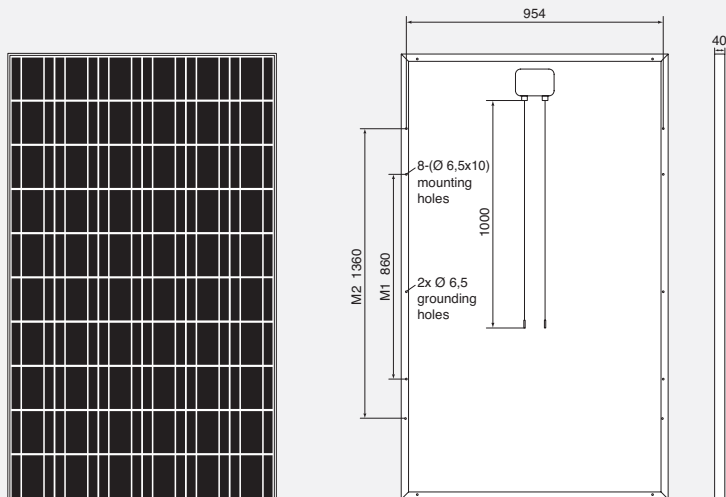

All dimensions in mm

Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m ²
Reverse current feed IR	16,0 A


(No external voltages greater than V_o may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0,33 %/K
Current I _{sc}	0,06 %/K
Output P _{mpp}	-0,44 %/K

I-U characteristic curve at 1000-800-500-250 W/m²

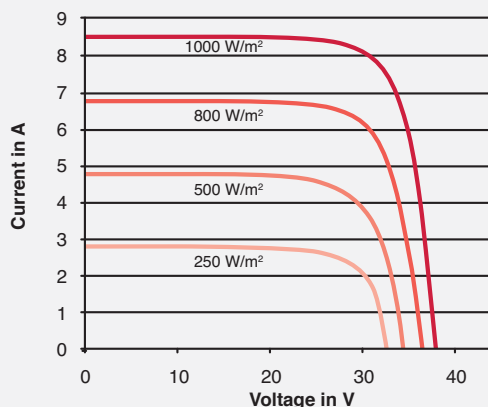

Example for AC-240P/156-60S