



AXIstorage Li 7S Made in Germany

High-performance lithium-ion-energy storage for residential and commercial applications

Advantages:



6,8 kWh capacity



Flexible configuration up to 82 kWh



6.600 cycles due to high quality cell technology



Permanent charging performance of up to 5 kW (90A)
Permanent discharge performance of up to 8.3 kW (150A)



Up to 20 years of life time due to an optimized cooling system



10 years of time value replacement warranty



3 units stackable



6.600
charging
cycles

6.8
kWh
capacity

82
kWh
flexible

AXIstorage Li 7S

Electrical Data

	SMA
Energy storage capacity	6,8 kWh
Nominal Voltage	55,5 V
Nominal Capacity	121,5 Ah
Charging Power	up to 5 kW (90 A) + 150 A Peak (for 1 sec.)
Discharging Power	upt to 8,3 kW (150 A) + 330 A Peak (for 1 sec.)
DoD	ca. 80%
Life Time	up to 20 years (25°C, max. 6.600 cycles)
Complete Cycles	6.600 (temperature 25°C)
Efficiency	up to 97% (at 25°C)
Cooling	Active fan
Range of temperature	0 - 45°C
Max. Air humidity (not condensing)	85%
BMS (Batterie Management System)	integrated

Mechanical Data

	SMA
Technology	Lithium (NMC)
H x W x D	536 x 675 x 475 mm
Weight	98 kg
Protection Category	IP21
Certifications and standards:	IEC62897Ed1, DIN EN50272-1/2, 61427-1/2, 61508, 62281, 60950-1, 62619 (draft standard), 62620, CE + UN38.3

Safety

- Double wall housing
- Elevated construction to protect against water damage
- Monitoring of current, voltage and temperature
- Single cell monitoring
- State of charge determination and battery monitoring (SOC + SOH)
- Passive balancing

Included in delivery

- 50 mm² connecting cable, lenght 2 m
- NH disconnect
- Integrated communication interface CAN, CANopen, Mod Bus, RS232, RS485

Compatibility

- SMA Sunny Island: 3.0 / 4.4 / 6.0 / 8.0

Accessories

- Patch cable RJ45
- NH1 Fuse 80 - 200 A

Accessories for System expansion

- Master Unit for 2 to 12 storages used in parallel

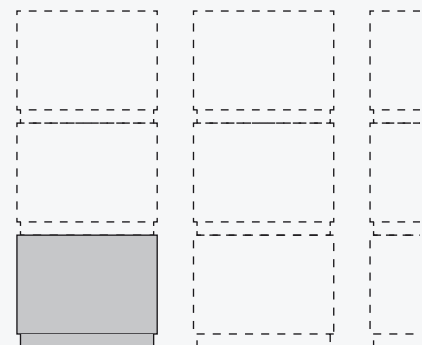
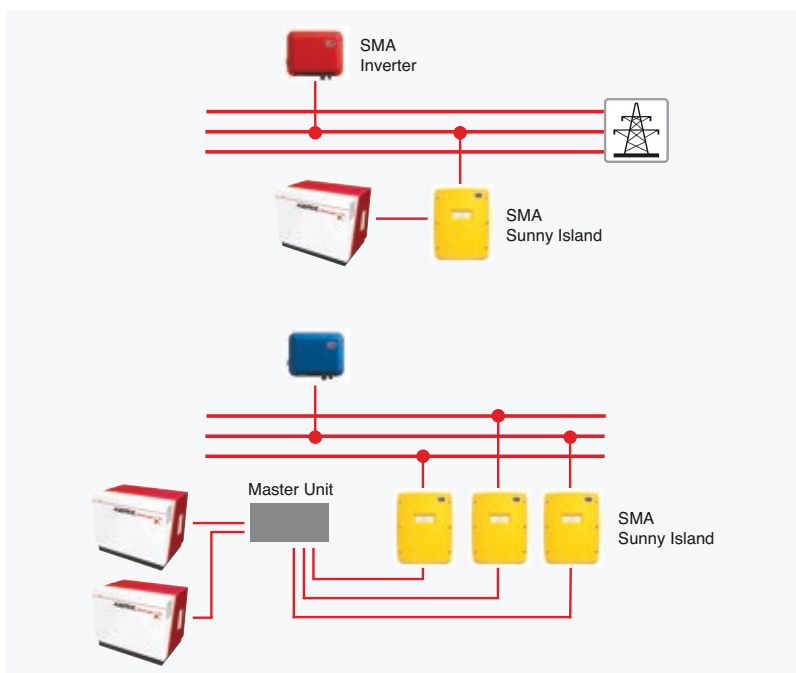


Fig. similar
flexibly expandable for 2 to 12 storages = 82 kWh