



AC-275M/156-60S
 AC-280M/156-60S
 AC-285M/156-60S
 AC-290M/156-60S
 AC-295M/156-60S

www.axitecsolar.com

-AXITEC
 high quality german solar brand

AXIworldpremium

60 cell/monocrystalline photovoltaic modules
 High performance photovoltaic modules


The advantages:

- 12** Years 12 years manufacturer's warranty
- A-Max** Highest performance due to specifically selected technologies and materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 5.400 Pa** Maximum 5400 Pa snow load
- 100%** 100% electroluminescence inspection
- IP 67** High quality junction box and connector systems



Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

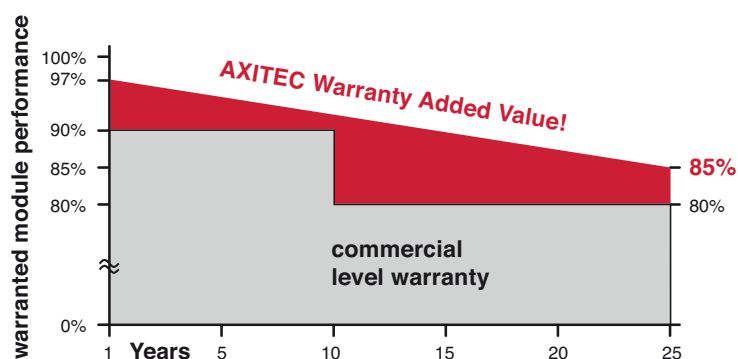

Distributed by:



Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mp}	Nominal voltage U _{mp}	Nominal current I _{mp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-275M/156-60S	275 Wp	31,20 V	8,86 A	9,50 A	39,32 V	16,90 %
AC-280M/156-60S	280 Wp	31,50 V	8,95 A	9,55 A	39,45 V	17,21 %
AC-285M/156-60S	285 Wp	31,59 V	9,09 A	9,68 A	39,56 V	17,52 %
AC-290M/156-60S	290 Wp	31,71 V	9,16 A	9,70 A	39,70 V	17,83 %
AC-295M/156-60S	295 Wp	31,80 V	9,29 A	9,75 A	39,95 V	18,13 %

Design

Frontside	3,2 mm hardened, low-reflection white glass
Cells	60 monocrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	35 mm silver anodized aluminium frame

Mechanical data

L x W x H	1640 x 992 x 35 mm
Weight	18,2 kg with frame

Power connection

Socket	Protection Class IP68 (3 bypass diodes)
Wire	approx. 1,0 m, 4 mm ²
Plug-in system	Plug/socket IP67

Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m ²
Reverse current feed IR	20,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients


Voltage U _{oc}	-0,30 %/K
Current I _{sc}	0,04 %/K
Output P _{mp}	-0,40 %/K

Low-light performance (Example for AC-260M/156-60S)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	1,71 A	30,00 V
400 W/m ²	3,41 A	30,10 V
600 W/m ²	5,18 A	30,18 V
800 W/m ²	6,89 A	30,36 V
1000 W/m ²	8,60 A	30,42 V

Packaging

Module pieces per pallet	30
Module pieces per HC-container	840

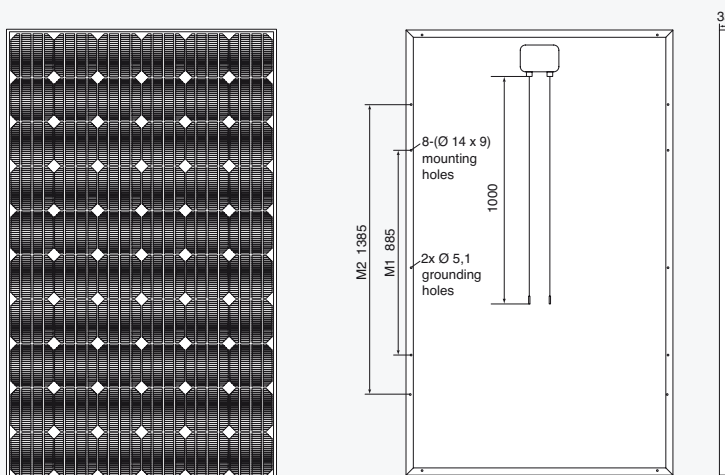

All dimensions in mm